

S Version Combination Strobe/Continuous

## Product Highlights


- Cost-effective, feature-rich design
- · Robust, sealed IP67 enclosure
- On-board smart driver seamless strobe or continuous
- Adaptive Overdrive optimized power under all strobe conditions
- Adaptive Power factors in your light heat sink options and external temperature options to maximize performance and lifespan



## General Specifications

	Color	Current	
Electrical Specifications  Driver internal to light source inputs are tolerant to 30VDC	WHI 625 470	~0.27A  Current draw will depend on what the EuroBrite" is trained to do. If it is attached to a heat sink; draw will be slightly higher. No heat sinking; draw will be slightly lower.	
Input Voltage Range	24V nom. (min 22/max 28)		
Maximum Input Current	0.42-0.49A		
Strobe/On-Off Control	up to 5X overdrive, active high		
Analog Intensity Control	Analog 0.7-10V; 0.7V=10% 10V=100%		
Trigger-to-Pulse Latency	10µsec		
Normal Operating Temperature	0 - 60°C		
Weight (g)	92.53g (3.27 oz)		
Standard Cable Information	No cable included; see part number <b>LC.5-M12-5-FX</b> or use standard coded 5-pin M12.		
Photobiological Risk Factor IEC 62471	Group 1 (Low-Risk): No photobiological hazard under normal behavioral limitations for 470, 625, and WHI.		
Compliance	CE ROHS IEC 62471		
IP Rating	IP67		
Lumen Maintenance	L70 = 50,000 hours		

## Mechanical Specifications

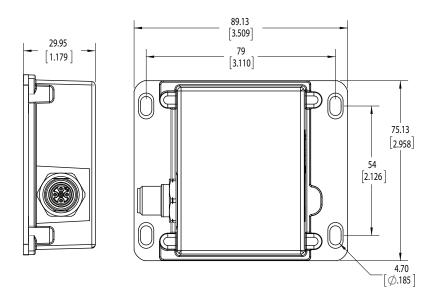

Length (mm)	75
Width (mm)	89
Height (mm)	30

Dimensions are in millimeters

## Part Number Key


Model		Control	Model Indicator	_	Spectral Wavelength
BL	_	Χ	XXXXXX	_	XXX
BL		S (strobe)	050075		470 (blue) 625 (red) WHI (white)
	050075-V 6050075-4				

Stock Product: shipped next day

BL-S050075-470 BL-S050075-625 BL-S050075-WHI


### Optical Performance

#### Intensity Distribution

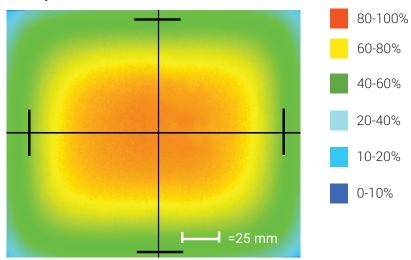

Optical measurement taken using BL-S050075-WHI

#### Area of Illuminance & Intensity

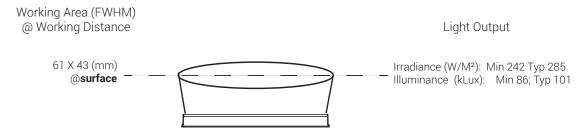

## Operation & Wiring


### Modes of Operation

Continuous	Strobe	Thermal Foldback
To enable output: Tie Trigger+ (black) HIGH to >0.5V.  The light remains ON as long as Trigger+ is high  Analog dimming is available: pin 5, gray	EuroBrite™ S-version uses Adaptive Overdrive™ to produce overdrive pulses while the trigger is HIGH.  Overdrive period occurs from 0-5msec; light output can be increased by as much as 5X.  Overdriving does not occur when pulses exceed 5msec.  Analog dimming is available: pin 5, gray	To engage Thermal Foldback: Before turning the light on, tie pin 2 (white) to pin 3 (GND, blue).  Onboard thermistor is sampled for 5 minutes. Light intensity will automatically adjust based on the Tcase during the training period.  The beginning of training is signified by a series of rapid flashes. While training, the light will blink every two seconds. A few slower blinks signal the end of the training period

#### Standard Wiring Information


Pin	Function	Wire Color	Туре
1	24VDC	Brown	Power
2	Thermal Foldback	White	Input
3	GND	Blue	Power
4	Trigger +	Black	Input
5	Analog	Gray	Input

#### Male 5-Position



**Analog Dimming** 

#### Wiring Diagrams

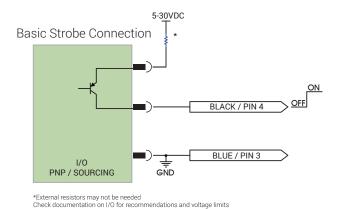

GRAY / PIN 5

Analog dimming works in both strobe and continuous

Warranty Information

Every Advanced illumination, Inc. (Ai) product is thoroughly inspected and tested before leaving the factory.

Products are warranted to be free of defects in workmanship and materials for a period of two years from the

original date of purchase. Should a defect develop during this period, please contact Ai Customer Service or your

Ai distributor for a Return Merchandise Authorization (RMA), and return the complete product, freight prepaid, to Ai.

If a defect is found, Ai will - at our discretion - repair or replace the product without charge. Ai claims no liability for

any implied warranties, including "merchantability" and "fitness for a specific purpose."

Electromagnetic Compatibility

This product was tested and complies with the regulatory requirements and limits for electromagnetic compatibility

(EMC) as stated in the product specifications. These requirements and limits are designed to provide reasonable

protection against harmful interference only when the product is operated in its intended industrial electromagnetic

environment. To minimize the potential for electromagnetic interference or unacceptable performance degradation,

install and use this product in strict accordance with the instructions in the product documentation.

Customer Service

For information on existing orders, or to make an order adjustment, contact us Monday through Friday 8:00 am to

5:00 pm, EST or send an email to orders@advill.com.

Company Information

Advanced Illumination

440 State Garage Road, Rochester VT. 05767

Phone: 802.767.3830

Fax: 802.767.3831

Email: info@advancedillumination.com

Web: advancedillumination.com

© 2015 Advanced Illumination Inc. All rights reserved

Beleased 6/5/2015 Updated 8/24/2016

5